




WEATHER SHIELD - ALUMINUM CLAD AWNING WITH COLONIAL SASH (8204) WITH EXTERIOR ALUMINUM ACCESSORIES

SCALE: ELECTRONIC FILE IS FULL SCALE (REVISED 10/23/12)


- WEATHER SHIELD RESERVES THE RIGHT, AS NECESSARY, TO CHANGE PRODUCT SPECIFICATIONS AND MATERIALS WITHOUT NOTICE.
 DIMENSIONS MAY BE ROUNDED TO THE NEAREST 1/16" [2mm].
 IMPORTANT: DIMENSIONS SHOWN ARE FOR STANDARD SHIM SPACE BETWEEN JAMB AND ROUGH OPENING. WHEN INSTALLING IN A JURISDICTION REQUIRING DESIGN PRESSURE (DP) RATED PERFORMANCE, WINDOW AND DOOR PRODUCTS MUST BE INSTALLED IN THE SAME METHOD THEY WERE INSTALLED FOR TESTING. A SHIM SPACE, NOT TO EXCEED 1/4" [6mm] IS REQUIRED AROUND THE SIDE JAMBS AND HEAD OF UNIT. REFER TO INSTALLATION INSTRUCTIONS FOR COMPLETE DETAILS.
 FOR UNITS REQUIRED TO MEET DESIGN PRESSURE (DP) RATED PERFORMANCE, ALUMINUM EXTERIOR ACCESSORIES MUST BE ORDERED AS "SHIPPED LOOSE" AND APPLIED TO UNITS AFTER INSTALLATION INTO ROUGH OPENING.
 FOR WINDOWS WITH FACTORY-APPLIED TO LIMIN EXTERIOR ACCESSORIES, (EXCLUDINO 7/8" [22mm] ALUMINUM BRICK MOULD), INSTALLATION CLIPS ARE RECOMMENDED FOR INSTALLATION. JAMB DEPTH MAY DECREASE BY 1/16" [2mm] DUE TO RIVETS USED TO APPLY THE ALUMINUM EXTERIOR ACCESSORIES TO NAILING FINS. WINDOWS WILL NOT MEET DESIGN PRESSURE (DP) RATED PERFORMANCE.



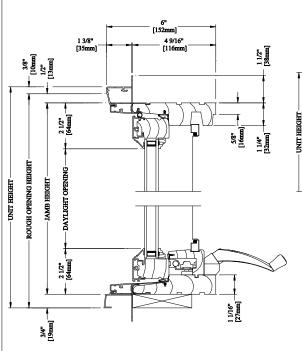








A - VERTICAL SECTION 3-1/2" ALUMINUM FLAT CASING (3-5/16" [84mm] ACTUAL SIZE)



A - VERTICAL SECTION **ALUMINUM K STYLE CASING** (3-13/16" [97mm] ACTUAL SIZE)

A - VERTICAL SECTION 1" ALUMINUM BRICK MOULD (7/8" [22mm] ACTUAL SIZE)