

Structural Performance Data

Aspire Inswing French Door (7502)


WEATHER SHIELD.
WINDOWS & DOORS

| Unit Style | Model Number | Size Tested (total frame size) | AAMA/WDMA/CSA 101/I.S.2/A440-05 | AAMA/WDMA/CSA 101/I.S.2/A440-08 | Design Pressure Rating (psf) | Structural Test Pressure (psf) | Water Performance (psf) | Air Infiltration (cfm/ft ²) | Forced Entry Resistance Grade / Type | Data Valid Until |
|---|--------------|-----------------------------------|------------------------------------|------------------------------------|------------------------------------|--------------------------------------|-------------------------------|--|--|---------------------|
| French Inswing Door - 2 Panel Standard Sill ¹ | 7502 | 73-11/16" x 96-1/32" | LW SHD-LC40 | LW LC-PG40-SHD | +/-40 | +/-60 | 4.50 | 0.03 | 10 / A | 4/5/2023 |
| French Inswing Door - 2 Panel Standard Sill ² | 7502 | 73-11/16" x 86-1/32" | LW SHD-LC50 | LW LC-PG50-SHD | +/-50 | +/-75 | 4.50 | 0.09 | 10 / A | 4/5/2023 |

Revised 4/1/19

¹Units tested with Ashland 3-point lock, 2-point handle activated flush bolts, adjustable hinges.

²Units tested with Ashland 3-point lock, 2-point handle activated flush bolts, butt hinges.

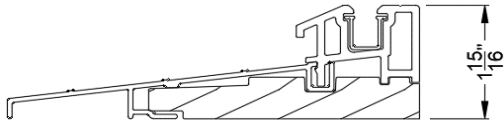

Standard Sill