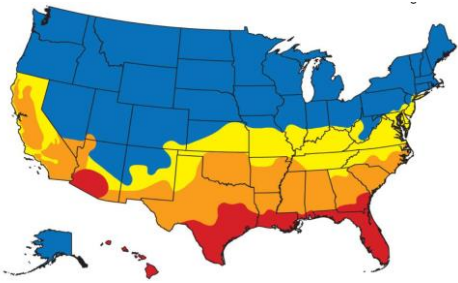
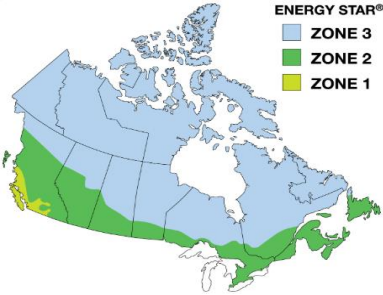


US Qualification Criteria	Climate Zone	U-Value	SHGC	
 <p>As of January 2016</p>	Northern	<=0.27	Any	Prescriptive
		=0.28	>=0.32	Equivalent Energy Performance
		=0.29	>=0.37	
	North-Central	=0.30	>=0.42	
		<=0.30	<=0.40	
	South-Central	<=0.30	<=0.25	
Southern	<=0.40	<=0.25		

Canadian Qualification Criteria	Climate Zone	U-Value	or	Energy Rating
 <p>As of February 2015</p>	Zone 1	<=1.60		>=25
	Zone 2	<=1.40		>=29
	Zone 3	<=1.20		>=34
	Air Leakage <= 0.3 cfm/ft2			

**U-Value**

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

**Solar Heat Gain Coefficient (SHGC)**

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

**Visible Light Transmittance**

The amount of light in the visible portion of the spectrum that passes through a glazing material.

**Condensation Resistance Rating**

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

**Energy Rating**

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

**R-Value**

A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

<sup>a</sup> Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

<sup>b</sup> Published values reflect 3mm/3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA

Premium Direct-Set Door Transom (830)



US ENERGY STAR V 6.0

CANADIAN ENERGY PERFORMANCE DATA



CANADA ENERGY STAR v 4.1

Grille Option	Glazing thickness	³NFRC Total Unit Calculations ⁴Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 6.0				U-Value (metric)	Maximum Air Leakage Ls/m²	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 4.1		
								N	NC	SC	S					1	2	3
No GIA or SDL	3/4"	Clear Insul	WEA-N-332-00123-00001	0.47	0.71	0.74	42					2.67	0.6	0.05	22			
	3/4"	Insul Low-E	WEA-N-332-00124-00001	0.32	0.35	0.64	54					1.82	0.6	0.05	20			
	3/4"	Insul Low E w/Argon	WEA-N-332-00130-00001	0.27	0.35	0.64	57	Y	Y			1.53	0.6	0.05	27	Y		
	3/4"	Passive Solar	WEA-N-332-00005-00001	0.33	0.62	0.72	53					1.87	0.6	0.05	35	Y	Y	Y
	3/4"	Passive Solar w/Argon	WEA-N-332-00013-00001	0.29	0.62	0.72	56	Y				1.65	0.6	0.05	40	Y	Y	Y
	3/4"	Passive Solar Extreme	WEA-N-332-00006-00001	0.26	0.56	0.70	41	Y				1.48	0.6	0.05	40	Y	Y	Y
	3/4"	Passive Solar Extreme w/Argon	WEA-N-332-00014-00001	0.24	0.56	0.70	44	Y				1.36	0.6	0.05	42	Y	Y	Y
	3/4"	Zo-e-shield 5	WEA-N-332-00125-00001	0.31	0.24	0.55	54				Y	1.76	0.6	0.05	15			
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-332-00131-00001	0.27	0.23	0.55	58	Y	Y	Y	Y	1.53	0.6	0.05	20	Y		
	3/4"	Zo-e-shield 5 Extreme	WEA-N-332-00004-00001	0.25	0.24	0.57	42	Y	Y	Y	Y	1.42	0.6	0.05	23	Y		
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-332-00012-00001	0.22	0.24	0.57	46	Y	Y	Y	Y	1.25	0.6	0.05	26	Y	Y	
	3/4"	Zo-e-shield 6	WEA-N-332-00083-00001	0.31	0.25	0.58	54				Y	1.76	0.6	0.05	16			
	3/4"	Zo-e-shield 6 w/ Argon	WEA-N-332-00089-00001	0.27	0.24	0.58	57	Y	Y	Y	Y	1.53	0.6	0.05	20	Y		
	3/4"	Zo-e SafeGuard Certified	WEA-N-332-00094-00001	0.31	0.24	0.57	55				Y	1.76	0.6	0.05	15			
	3/4"	Zo-e SafeGuard Certified w/ Argon	WEA-N-332-00096-00001	0.27	0.24	0.57	58	Y	Y	Y	Y	1.53	0.6	0.05	20	Y		
	3/4"	Zo-e-shield 7	WEA-N-332-00017-00001	0.24	0.23	0.47	63	Y	Y	Y	Y	1.36	0.6	0.05	23	Y	Y	
	3/4"	Zo-e-shield 7 w/ Argon	WEA-N-332-00021-00001	0.19	0.23	0.47	67	Y	Y	Y	Y	1.08	0.6	0.05	30	Y	Y	Y
	3/4"	Insul Low-E 240	WEA-N-332-00007-00001	0.32	0.23	0.36	53				Y	1.82	0.6	0.05	13			
	3/4"	Insul Low-E 240 w/Argon	WEA-N-332-00015-00001	0.28	0.23	0.36	56		Y	Y	Y	1.59	0.6	0.05	18	Y		
	3/4"	Insul Low-E 340	WEA-N-332-00008-00001	0.31	0.17	0.35	54				Y	1.76	0.6	0.05	11			
3/4"	Insul Low-E 340 w/Argon	WEA-N-332-00016-00001	0.27	0.16	0.35	57	Y	Y	Y	Y	1.53	0.6	0.05	16				
3/4"	Bronze Low E	WEA-N-332-00002-00011	0.32	0.36	0.49	53					1.82	0.6	0.05	21				
3/4"	Bronze Low E w/Argon	WEA-N-332-00010-00011	0.28	0.36	0.49	57	Y	Y			1.59	0.6	0.05	26	Y			
Less Than 1" GIA or SDL	3/4"	Clear Insul	WEA-N-332-00123-00002	0.47	0.64	0.67	42					2.67	0.6	0.05	18			
	3/4"	Insul Low-E	WEA-N-332-00124-00002	0.32	0.32	0.57	54					1.82	0.6	0.05	19			
	3/4"	Insul Low E w/Argon	WEA-N-332-00130-00002	0.27	0.32	0.57	57	Y	Y			1.53	0.6	0.05	25	Y		
	3/4"	Passive Solar	WEA-N-332-00005-00002	0.33	0.56	0.64	53					1.87	0.6	0.05	31	Y	Y	
	3/4"	Passive Solar w/Argon	WEA-N-332-00013-00002	0.29	0.56	0.64	56	Y				1.65	0.6	0.05	36	Y	Y	Y
	3/4"	Passive Solar Extreme	WEA-N-332-00006-00002	0.26	0.51	0.63	41	Y				1.48	0.6	0.05	37	Y	Y	Y
	3/4"	Passive Solar Extreme w/Argon	WEA-N-332-00014-00002	0.24	0.51	0.63	44	Y				1.36	0.6	0.05	40	Y	Y	Y
	3/4"	Zo-e-shield 5	WEA-N-332-00125-00002	0.31	0.22	0.49	54				Y	1.76	0.6	0.05	14			
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-332-00131-00002	0.27	0.21	0.49	58	Y	Y	Y	Y	1.53	0.6	0.05	19	Y		
	3/4"	Zo-e-shield 5 Extreme	WEA-N-332-00004-00002	0.25	0.22	0.51	42	Y	Y	Y	Y	1.42	0.6	0.05	22	Y		
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-332-00012-00002	0.22	0.22	0.51	46	Y	Y	Y	Y	1.25	0.6	0.05	25	Y	Y	
	3/4"	Zo-e-shield 6	WEA-N-332-00083-00002	0.31	0.22	0.52	54				Y	1.76	0.6	0.05	14			
	3/4"	Zo-e-shield 6 w/ Argon	WEA-N-332-00089-00002	0.27	0.22	0.52	57	Y	Y	Y	Y	1.53	0.6	0.05	19	Y		
	3/4"	Zo-e SafeGuard Certified	WEA-N-332-00094-00002	0.31	0.22	0.51	55				Y	1.76	0.6	0.05	14			
	3/4"	Zo-e SafeGuard Certified w/ Argon	WEA-N-332-00096-00002	0.27	0.22	0.51	58	Y	Y	Y	Y	1.53	0.6	0.05	19	Y		
	3/4"	Zo-e-shield 7	WEA-N-332-00018-00001	0.24	0.21	0.42	63	Y	Y	Y	Y	1.36	0.6	0.05	22	Y	Y	
	3/4"	Zo-e-shield 7 w/ Argon	WEA-N-332-00022-00001	0.20	0.21	0.42	67	Y	Y	Y	Y	1.14	0.6	0.05	27	Y	Y	Y
	3/4"	Insul Low-E 240	WEA-N-332-00007-00002	0.32	0.21	0.33	53				Y	1.82	0.6	0.05	12			
	3/4"	Insul Low-E 240 w/Argon	WEA-N-332-00015-00002	0.28	0.21	0.33	56		Y	Y	Y	1.59	0.6	0.05	17	Y		
	3/4"	Insul Low-E 340	WEA-N-332-00008-00002	0.31	0.15	0.32	54				Y	1.76	0.6	0.05	10			
3/4"	Insul Low-E 340 w/Argon	WEA-N-332-00016-00002	0.27	0.15	0.32	57	Y	Y	Y	Y	1.53	0.6	0.05	15				
3/4"	Bronze Low E	WEA-N-332-00002-00012	0.32	0.33	0.44	53					1.82	0.6	0.05	19				
3/4"	Bronze Low E w/Argon	WEA-N-332-00010-00012	0.28	0.32	0.44	57	Y	Y			1.59	0.6	0.05	24	Y			
1" Or Over GIA or SDL	3/4"	Clear Insul	WEA-N-332-00123-00003	0.47	0.58	0.60	42					2.67	0.6	0.05	15			
	3/4"	Insul Low-E	WEA-N-332-00124-00003	0.32	0.29	0.51	54					1.82	0.6	0.05	17			
	3/4"	Insul Low E w/Argon	WEA-N-332-00130-00003	0.27	0.29	0.51	57	Y	Y			1.53	0.6	0.05	23	Y		
	3/4"	Passive Solar	WEA-N-332-00005-00003	0.33	0.50	0.58	53					1.87	0.6	0.05	28	Y		
	3/4"	Passive Solar w/Argon	WEA-N-332-00013-00003	0.29	0.50	0.58	56	Y				1.65	0.6	0.05	33	Y	Y	
	3/4"	Passive Solar Extreme	WEA-N-332-00006-00003	0.26	0.46	0.56	41	Y				1.48	0.6	0.05	34	Y	Y	Y
	3/4"	Passive Solar Extreme w/Argon	WEA-N-332-00014-00003	0.24	0.46	0.56	44	Y				1.36	0.6	0.05	37	Y	Y	Y
	3/4"	Zo-e-shield 5	WEA-N-332-00125-00003	0.31	0.20	0.44	54				Y	1.76	0.6	0.05	13			
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-332-00131-00003	0.27	0.19	0.44	58	Y	Y	Y	Y	1.53	0.6	0.05	17	Y		
	3/4"	Zo-e-shield 5 Extreme	WEA-N-332-00004-00003	0.25	0.20	0.46	42	Y	Y	Y	Y	1.42	0.6	0.05	20	Y		
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-332-00012-00003	0.22	0.20	0.46	46	Y	Y	Y	Y	1.25	0.6	0.05	24	Y	Y	
	3/4"	Zo-e-shield 6	WEA-N-332-00083-00003	0.31	0.20	0.46	54				Y	1.76	0.6	0.05	13			
	3/4"	Zo-e-shield 6 w/ Argon	WEA-N-332-00089-00003	0.27	0.20	0.46	57	Y	Y	Y	Y	1.53	0.6	0.05	18	Y		
	3/4"	Zo-e SafeGuard Certified	WEA-N-332-00094-00003	0.31	0.20	0.46	55				Y	1.76	0.6	0.05	13			
	3/4"	Zo-e SafeGuard Certified w/ Argon	WEA-N-332-00096-00003	0.27	0.20	0.46	58	Y	Y	Y	Y	1.53	0.6	0.05	18	Y		
	3/4"	Zo-e-shield 7	WEA-N-332-00018-00002	0.24	0.19	0.38	63	Y	Y	Y	Y	1.36	0.6	0.05	21	Y	Y	
	3/4"	Zo-e-shield 7 w/ Argon	WEA-N-332-00022-00002	0.20	0.19	0.38	67	Y	Y	Y	Y	1.14	0.6	0.05	26	Y	Y	Y
	3/4"	Insul Low-E 240	WEA-N-332-00007-00003	0.32	0.19	0.29	53				Y	1.82	0.6	0.05	11			
	3/4"	Insul Low-E 240 w/Argon	WEA-N-332-00015-00003	0.28	0.19	0.29	56		Y	Y	Y	1.59	0.6	0.05	16	Y		
	3/4"	Insul Low-E 340	WEA-N-332-00008-00003	0.31	0.14	0.28	54				Y	1.76	0.6	0.05	9			
3/4"	Insul Low-E 340 w/Argon	WEA-N-332-00016-00003	0.27	0.14	0.28	57	Y	Y	Y	Y	1.53	0.6	0.05	14				
3/4"	Bronze Low E	WEA-N-332-00002-00013	0.32	0.29	0.39	53					1.82	0.6	0.05	17				
3/4"	Bronze Low E w/Argon	WEA-N-332-00010-00013	0.28	0.29	0.39	57</												