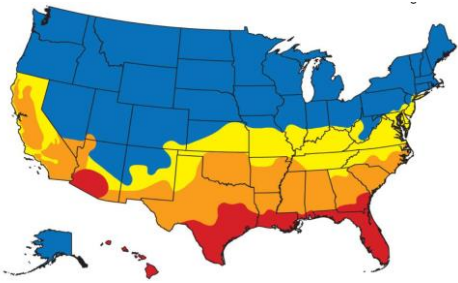
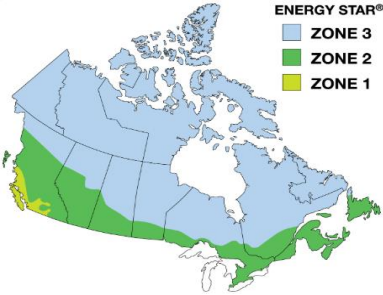


US Qualification Criteria	Climate Zone	U-Value	SHGC
 <p>As of January 2016</p>	Northern	<=0.30	<=0.40
	North-Central		<=0.25
	South-Central		
	Southern		

Canadian Qualification Criteria	Climate Zone	U-Value	or	Energy Rating
 <p>As of February 2015</p>	Zone 1	<=1.60		>=25
	Zone 2	<=1.40		>=29
	Zone 3	<=1.20		>=34
	Air Leakage <= 0.3 cfm/ft2			

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm/3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA

Premium 2-1/4" Multi-Slide Door (8721)



US
ENERGY STAR V
6.0

CANADIAN ENERGY
PERFORMANCE DATA



CANADA
ENERGY
STAR v 4.1

Grille Option	Glazing thickness	³NFRC Total Unit Calculations ⁴Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 6.0				CANADIAN ENERGY PERFORMANCE DATA						
								N	NC	SC	S	U-Value (metric)	Maximum Air Leakage Ls/m²	Air Infiltration/Exfiltration Average	Energy Rating	1	2	3
No GIA or SDL	1"	Clear Insul	WEA-N-312-00516-00001	0.48	0.50	0.51	42					2.73	0.6	1.32	6			
	1"	Insul Low-E	WEA-N-312-00517-00001	0.38	0.25	0.44	50					2.16	0.6	1.32	5			
	1"	Insul Low E w/Argon	WEA-N-312-00523-00001	0.35	0.25	0.44	53					1.99	0.6	1.32	8			
	1"	Passive Solar	WEA-N-312-00164-00001	0.38	0.43	0.49	51					2.16	0.6	1.32	15			
	1"	Passive Solar w/Argon	WEA-N-312-00185-00001	0.36	0.44	0.49	54					2.04	0.6	1.32	18			
	1"	Zo-e-shield 5	WEA-N-312-00518-00001	0.38	0.18	0.39	51					2.16	0.6	1.32	0			
	1"	Zo-e-shield 5 w/ Argon	WEA-N-312-00524-00001	0.35	0.18	0.39	53					1.99	0.6	1.32	4			
	1"	Zo-e-shield 5 Extreme	WEA-N-312-00131-00001	0.33	0.18	0.39	42					1.87	0.6	1.32	7			
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-312-00149-00001	0.31	0.17	0.39	45					1.76	0.6	1.32	9			
	1"	Zo-e-shield 6	WEA-N-312-00134-00001	0.37	0.18	0.39	51					2.10	0.6	1.32	2			
	1"	Zo-e-shield 6 w/ Argon	WEA-N-312-00152-00001	0.34	0.18	0.39	54					1.93	0.6	1.32	6			
	1"	Zo-e SafeGuard Certified	WEA-N-312-00138-00001	0.37	0.18	0.39	52					2.10	0.6	1.32	2			
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-312-00156-00001	0.34	0.18	0.39	54					1.93	0.6	1.32	6			
	1"	Insul Low-E 240	WEA-N-312-00171-00001	0.38	0.17	0.25	51					2.16	0.6	1.32	0			
	Less Than 1" GIA or SDL	1"	Insul Low-E 240 w/Argon	WEA-N-312-00192-00001	0.35	0.17	0.25	54					1.99	0.6	1.32	4		
1"		Insul Low-E 340	WEA-N-312-00178-00001	0.38	0.12	0.24	52					2.16	0.6	1.32	-3			
1"		Insul Low-E 340 w/Argon	WEA-N-312-00199-00001	0.35	0.12	0.24	55					1.99	0.6	1.32	1			
1"		Bronze Low E	WEA-N-312-00114-00011	0.38	0.25	0.33	51					2.16	0.6	1.32	5			
1"		Bronze Low E w/Argon	WEA-N-312-00121-00011	0.35	0.25	0.33	54					1.99	0.6	1.32	8			
1"		Clear Insul	WEA-N-312-00516-00002	0.48	0.43	0.44	42					2.73	0.6	1.32	2			
1"		Insul Low-E	WEA-N-312-00517-00002	0.38	0.22	0.38	50					2.16	0.6	1.32	3			
1"		Insul Low E w/Argon	WEA-N-312-00523-00002	0.35	0.22	0.38	53					1.99	0.6	1.32	7			
1"		Passive Solar	WEA-N-312-00164-00002	0.38	0.38	0.42	51					2.16	0.6	1.32	12			
1"		Passive Solar w/Argon	WEA-N-312-00185-00002	0.36	0.38	0.42	54					2.04	0.6	1.32	15			
1"		Zo-e-shield 5	WEA-N-312-00518-00002	0.38	0.16	0.33	51					2.16	0.6	1.32	-1			
1"		Zo-e-shield 5 w/ Argon	WEA-N-312-00524-00002	0.35	0.16	0.33	53					1.99	0.6	1.32	3			
1"		Zo-e-shield 5 Extreme	WEA-N-312-00131-00002	0.33	0.15	0.34	42					1.87	0.6	1.32	5			
1"		Zo-e-shield 5 Extreme w/ Argon	WEA-N-312-00149-00002	0.31	0.15	0.34	45					1.76	0.6	1.32	8			
1"		Zo-e-shield 6	WEA-N-312-00134-00002	0.37	0.16	0.34	51					2.10	0.6	1.32	1			
1"	Zo-e-shield 6 w/ Argon	WEA-N-312-00152-00002	0.34	0.16	0.34	54					1.93	0.6	1.32	4				
1"	Zo-e SafeGuard Certified	WEA-N-312-00138-00002	0.37	0.16	0.34	52					2.10	0.6	1.32	1				
1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-312-00156-00002	0.34	0.16	0.34	54					1.93	0.6	1.32	4				
1"	Insul Low-E 240	WEA-N-312-00171-00002	0.38	0.15	0.21	51					2.16	0.6	1.32	-1				
1"	Insul Low-E 240 w/Argon	WEA-N-312-00192-00002	0.35	0.15	0.21	54					1.99	0.6	1.32	2				
1"	Insul Low-E 340	WEA-N-312-00178-00002	0.38	0.11	0.21	52					2.16	0.6	1.32	-4				
1"	Insul Low-E 340 w/Argon	WEA-N-312-00199-00002	0.35	0.11	0.21	55					1.99	0.6	1.32	0				
1"	Bronze Low E	WEA-N-312-00114-00012	0.38	0.22	0.28	51					2.16	0.6	1.32	3				
1"	Bronze Low E w/Argon	WEA-N-312-00121-00012	0.35	0.22	0.28	54					1.99	0.6	1.32	7				
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-312-00516-00003	0.48	0.37	0.37	42					2.73	0.6	1.32	-1			
	1"	Insul Low-E	WEA-N-312-00517-00003	0.38	0.19	0.32	50					2.16	0.6	1.32	1			
	1"	Insul Low E w/Argon	WEA-N-312-00523-00003	0.35	0.19	0.32	53					1.99	0.6	1.32	5			
	1"	Passive Solar	WEA-N-312-00164-00003	0.38	0.33	0.36	51					2.16	0.6	1.32	9			
	1"	Passive Solar w/Argon	WEA-N-312-00185-00003	0.36	0.33	0.36	54					2.04	0.6	1.32	12			
	1"	Zo-e-shield 5	WEA-N-312-00518-00003	0.38	0.14	0.28	51					2.16	0.6	1.32	-2			
	1"	Zo-e-shield 5 w/ Argon	WEA-N-312-00524-00003	0.35	0.14	0.28	53					1.99	0.6	1.32	2			
	1"	Zo-e-shield 5 Extreme	WEA-N-312-00131-00003	0.33	0.14	0.29	42					1.87	0.6	1.32	5			
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-312-00149-00003	0.31	0.14	0.29	45					1.76	0.6	1.32	7			
	1"	Zo-e-shield 6	WEA-N-312-00134-00003	0.37	0.14	0.29	51					2.10	0.6	1.32	-1			
	1"	Zo-e-shield 6 w/ Argon	WEA-N-312-00152-00003	0.34	0.14	0.29	54					1.93	0.6	1.32	3			
	1"	Zo-e SafeGuard Certified	WEA-N-312-00138-00003	0.37	0.14	0.29	52					2.10	0.6	1.32	-1			
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-312-00156-00003	0.34	0.14	0.29	54					1.93	0.6	1.32	3			
	1"	Insul Low-E 240	WEA-N-312-00171-00003	0.38	0.13	0.18	51					2.16	0.6	1.32	-2			
	1"	Insul Low-E 240 w/Argon	WEA-N-312-00192-00003	0.35	0.13	0.18	54					1.99	0.6	1.32	1			
1"	Insul Low-E 340	WEA-N-312-00178-00003	0.38	0.10	0.18	52					2.16	0.6	1.32	-4				
1"	Insul Low-E 340 w/Argon	WEA-N-312-00199-00003	0.35	0.10	0.18	55					1.99	0.6	1.32	0				
1"	Bronze Low E	WEA-N-312-00114-00013	0.38	0.19	0.24	51					2.16	0.6	1.32	1				
1"	Bronze Low E w/Argon	WEA-N-312-00121-00013	0.35	0.19	0.24	54					1.99	0.6	1.32	5				