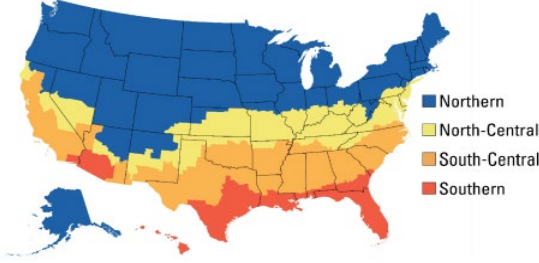



US Qualification Criteria	Climate Zone	U-Value	SHGC		
 <p>Energy Star Version 7.0 Starting October 2023</p>	Northern	≤ 0.22	≥ 0.17	Prescriptive	
			$= 0.23$	≥ 0.35	Equivalent Energy Performance
			$= 0.24$		
			$= 0.25$	≥ 0.40	
			$= 0.26$		
	North-Central	≤ 0.25	≤ 0.40		
	South-Central	≤ 0.28	≤ 0.23		
Southern	≤ 0.32	≤ 0.23			

Canadian Qualification Criteria	U-Value	or	Energy Rating
 <p>Energy Star Version 5.0 starting January 2020</p>	≤ 1.22		≥ 34
	Air Leakage ≤ 1.5 L/s/m ²		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

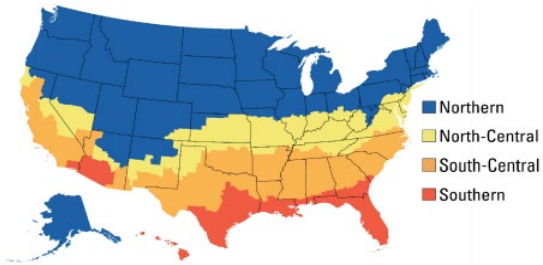
R-Value


A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, $U = 1/R$ and $R = 1/U$.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA						
Premium Bi-fold Windows (8622) - Standard sill											CANADIAN ENERGY PERFORMANCE DATA						
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 5.0	
								N	NC	SC	S						
No GIA or SDL	1"	Clear Insul	WEA-N-301-00243-00001	0.42	0.41	0.43	44					2.38	1.5	0.08	11		
	1"	Insul Low-E	WEA-N-301-00244-00001	0.34	0.23	0.37	53					1.93	1.5	0.08	11		
	1"	Insul Low E w/Argon	WEA-N-301-00252-00001	0.32	0.22	0.37	55					1.82	1.5	0.08	13		
	1"	Passive Solar	WEA-N-301-00246-00001	0.34	0.37	0.41	52					1.93	1.5	0.08	19		
	1"	Passive Solar w/Argon	WEA-N-301-00254-00001	0.32	0.37	0.41	55					1.82	1.5	0.08	21		
	1"	Passive Solar Extreme	WEA-N-301-00250-00001	0.30	0.33	0.40	42					1.70	1.5	0.08	22		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00258-00001	0.29	0.33	0.40	45					1.65	1.5	0.08	23		
	1"	Zo-e-shield 5	WEA-N-301-00245-00001	0.34	0.15	0.34	53					1.93	1.5	0.08	6		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00253-00001	0.31	0.15	0.34	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00249-00001	0.30	0.15	0.33	43				Y	1.70	1.5	0.08	11		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00257-00001	0.28	0.15	0.33	46			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e-shield 6	WEA-N-301-00329-00001	0.29	0.15	0.32	40				Y	Y	1.65	1.5	0.08	12	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00336-00001	0.28	0.15	0.32	45			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00328-00001	0.33	0.15	0.33	51					1.87	1.5	0.08	8		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00335-00001	0.31	0.15	0.33	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 7	WEA-N-301-00307-00001	0.29	0.14	0.27	59				Y	Y	1.65	1.5	0.08	12	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00311-00001	0.26	0.14	0.27	62			Y	Y	1.48	1.5	0.08	16		
	1"	Insul Low-E 240	WEA-N-301-00247-00001	0.34	0.14	0.21	52					1.93	1.5	0.08	6		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00255-00001	0.32	0.14	0.21	55				Y	1.82	1.5	0.08	8		
	1"	Insul Low-E 340	WEA-N-301-00248-00001	0.34	0.11	0.20	53					1.93	1.5	0.08	4		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00256-00001	0.31	0.10	0.20	56				Y	1.76	1.5	0.08	7			
1"	Bronze Low E	WEA-N-301-00244-00011	0.34	0.21	0.28	53					1.93	1.5	0.08	10			
1"	Bronze Low E w/Argon	WEA-N-301-00252-00011	0.32	0.21	0.28	55				Y	1.82	1.5	0.08	12			
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-301-00243-00002	0.42	0.35	0.36	44					2.38	1.5	0.08	8		
	1"	Insul Low-E	WEA-N-301-00244-00002	0.34	0.20	0.32	53					1.93	1.5	0.08	9		
	1"	Insul Low E w/Argon	WEA-N-301-00252-00002	0.32	0.19	0.32	55				Y	1.82	1.5	0.08	11		
	1"	Passive Solar	WEA-N-301-00246-00002	0.34	0.31	0.35	52					1.93	1.5	0.08	15		
	1"	Passive Solar w/Argon	WEA-N-301-00254-00002	0.32	0.31	0.35	55					1.82	1.5	0.08	18		
	1"	Passive Solar Extreme	WEA-N-301-00250-00002	0.30	0.29	0.34	42					1.70	1.5	0.08	19		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00258-00002	0.29	0.29	0.34	45					1.65	1.5	0.08	20		
	1"	Zo-e-shield 5	WEA-N-301-00245-00002	0.34	0.13	0.28	53					1.93	1.5	0.08	5		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00253-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00249-00002	0.30	0.13	0.28	43				Y	1.70	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00257-00002	0.28	0.13	0.28	46			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e-shield 6	WEA-N-301-00329-00002	0.29	0.13	0.27	40				Y	Y	1.65	1.5	0.08	11	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00336-00002	0.28	0.13	0.27	45			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00328-00002	0.33	0.13	0.28	51					1.87	1.5	0.08	6		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00335-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 7	WEA-N-301-00308-00001	0.29	0.12	0.23	59				Y	Y	1.65	1.5	0.08	11	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00312-00001	0.27	0.12	0.23	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00247-00002	0.34	0.13	0.18	52					1.93	1.5	0.08	5		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00255-00002	0.32	0.12	0.18	55				Y	1.82	1.5	0.08	7		
	1"	Insul Low-E 340	WEA-N-301-00248-00002	0.34	0.09	0.17	53					1.93	1.5	0.08	3		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00256-00002	0.31	0.09	0.17	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00244-00012	0.34	0.19	0.23	53					1.93	1.5	0.08	9			
1"	Bronze Low E w/Argon	WEA-N-301-00252-00012	0.32	0.18	0.23	55				Y	1.82	1.5	0.08	10			
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-301-00243-00003	0.42	0.30	0.30	44					2.38	1.5	0.08	5		
	1"	Insul Low-E	WEA-N-301-00244-00003	0.34	0.17	0.26	53					1.93	1.5	0.08	7		
	1"	Insul Low E w/Argon	WEA-N-301-00252-00003	0.32	0.17	0.26	55				Y	1.82	1.5	0.08	10		
	1"	Passive Solar	WEA-N-301-00246-00003	0.34	0.27	0.29	52					1.93	1.5	0.08	13		
	1"	Passive Solar w/Argon	WEA-N-301-00254-00003	0.32	0.27	0.29	55					1.82	1.5	0.08	16		
	1"	Passive Solar Extreme	WEA-N-301-00250-00003	0.30	0.24	0.28	42					1.70	1.5	0.08	16		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00258-00003	0.29	0.24	0.28	45					1.65	1.5	0.08	18		
	1"	Zo-e-shield 5	WEA-N-301-00245-00003	0.34	0.12	0.24	53					1.93	1.5	0.08	5		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00253-00003	0.31	0.11	0.24	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00249-00003	0.30	0.11	0.23	43				Y	Y	1.70	1.5	0.08	9	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00257-00003	0.28	0.11	0.23	46			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e-shield 6	WEA-N-301-00329-00003	0.29	0.11	0.23	40				Y	Y	1.65	1.5	0.08	10	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00336-00003	0.28	0.11	0.23	45			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00328-00003	0.33	0.11	0.23	51					1.87	1.5	0.08	5		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00335-00003	0.31	0.11	0.23	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 7	WEA-N-301-00308-00002	0.29	0.11	0.19	59				Y	Y	1.65	1.5	0.08	10	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00312-00002	0.27	0.11	0.19	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00247-00003	0.34	0.11	0.15	52					1.93	1.5	0.08	4		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00255-00003	0.32	0.11	0.15	55				Y	1.82	1.5	0.08	6		
	1"	Insul Low-E 340	WEA-N-301-00248-00003	0.34	0.08	0.14	53					1.93	1.5	0.08	2		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00256-00003	0.31	0.08	0.14	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00244-00013	0.34	0.16	0.19	53					1.93	1.5	0.08	7			
1"	Bronze Low E w/Argon	WEA-N-301-00252-00013	0.32	0.16	0.19	55				Y	1.82	1.5	0.08	9			

US Qualification Criteria	Climate Zone	U-Value	SHGC	
 <p>Energy Star Version 7.0 Starting October 2023</p>	Northern	<=0.22	>=0.17	Prescriptive
		=0.23	>=0.35	Equivalent Energy Performance
		=0.24		
		=0.25		
		=0.26		
	North-Central	<=0.25	<=0.40	
	South-Central	<=0.28	<=0.23	
Southern	<=0.32	<=0.23		

Canadian Qualification Criteria	U-Value	or	Energy Rating
 <p>Energy Star Version 5.0 starting January 2020</p>	<=1.22		>=34
	Air Leakage <= 1.5 L/s/m2		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

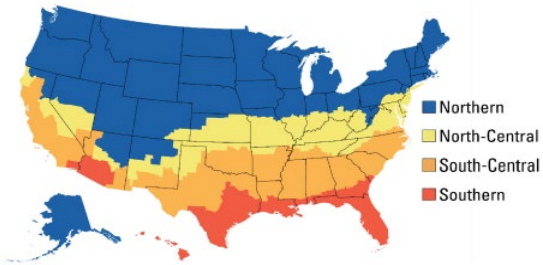
R-Value


A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA						
Premium Bi-fold Windows (8622) - ADA sill											ENERGY STAR						
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 5.0	
								N	NC	SC	S						
No GIA or SDL	1"	Clear Insul	WEA-N-301-00423-00001	0.42	0.41	0.43	44					2.38	1.5	0.08	11		
	1"	Insul Low-E	WEA-N-301-00424-00001	0.34	0.23	0.37	53					1.93	1.5	0.08	11		
	1"	Insul Low E w/Argon	WEA-N-301-00432-00001	0.32	0.22	0.37	55					1.82	1.5	0.08	13		
	1"	Passive Solar	WEA-N-301-00426-00001	0.34	0.37	0.41	52					1.93	1.5	0.08	19		
	1"	Passive Solar w/Argon	WEA-N-301-00434-00001	0.32	0.37	0.41	55					1.82	1.5	0.08	21		
	1"	Passive Solar Extreme	WEA-N-301-00430-00001	0.30	0.33	0.40	42					1.70	1.5	0.08	22		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00438-00001	0.29	0.33	0.40	45					1.65	1.5	0.08	23		
	1"	Zo-e-shield 5	WEA-N-301-00425-00001	0.34	0.15	0.34	53					1.93	1.5	0.08	6		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00433-00001	0.31	0.15	0.34	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00429-00001	0.30	0.15	0.33	43				Y	1.70	1.5	0.08	11		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00437-00001	0.28	0.15	0.33	46			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e-shield 6	WEA-N-301-00509-00001	0.29	0.15	0.32	40				Y	Y	1.65	1.5	0.08	12	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00516-00001	0.28	0.15	0.32	45			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00508-00001	0.33	0.15	0.33	51					1.87	1.5	0.08	8		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00515-00001	0.31	0.15	0.33	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 7	WEA-N-301-00487-00001	0.29	0.14	0.27	59				Y	Y	1.65	1.5	0.08	12	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00491-00001	0.26	0.14	0.27	62			Y	Y	1.48	1.5	0.08	16		
	1"	Insul Low-E 240	WEA-N-301-00427-00001	0.34	0.14	0.21	52					1.93	1.5	0.08	6		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00435-00001	0.32	0.14	0.21	55				Y	1.82	1.5	0.08	8		
	1"	Insul Low-E 340	WEA-N-301-00428-00001	0.34	0.11	0.20	53					1.93	1.5	0.08	4		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00436-00001	0.31	0.10	0.20	56				Y	1.76	1.5	0.08	7			
1"	Bronze Low E	WEA-N-301-00424-00011	0.34	0.21	0.28	53					1.93	1.5	0.08	10			
1"	Bronze Low E w/Argon	WEA-N-301-00432-00011	0.32	0.21	0.28	55				Y	1.82	1.5	0.08	12			
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-301-00423-00002	0.42	0.35	0.36	44					2.38	1.5	0.08	8		
	1"	Insul Low-E	WEA-N-301-00424-00002	0.34	0.20	0.32	53					1.93	1.5	0.08	9		
	1"	Insul Low E w/Argon	WEA-N-301-00432-00002	0.32	0.19	0.32	55				Y	1.82	1.5	0.08	11		
	1"	Passive Solar	WEA-N-301-00426-00002	0.34	0.31	0.35	52					1.93	1.5	0.08	15		
	1"	Passive Solar w/Argon	WEA-N-301-00434-00002	0.32	0.31	0.35	55					1.82	1.5	0.08	18		
	1"	Passive Solar Extreme	WEA-N-301-00430-00002	0.30	0.29	0.34	42					1.70	1.5	0.08	19		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00438-00002	0.29	0.29	0.34	45					1.65	1.5	0.08	20		
	1"	Zo-e-shield 5	WEA-N-301-00425-00002	0.34	0.13	0.28	53					1.93	1.5	0.08	5		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00433-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00429-00002	0.30	0.13	0.28	43				Y	1.70	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00437-00002	0.28	0.13	0.28	46			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e-shield 6	WEA-N-301-00509-00002	0.29	0.13	0.27	40				Y	Y	1.65	1.5	0.08	11	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00516-00002	0.28	0.13	0.27	45			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00508-00002	0.33	0.13	0.28	51					1.87	1.5	0.08	6		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00515-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 7	WEA-N-301-00488-00001	0.29	0.12	0.23	59				Y	Y	1.65	1.5	0.08	11	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00492-00001	0.27	0.12	0.23	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00427-00002	0.34	0.13	0.18	52					1.93	1.5	0.08	5		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00435-00002	0.32	0.12	0.18	55				Y	1.82	1.5	0.08	7		
	1"	Insul Low-E 340	WEA-N-301-00428-00002	0.34	0.09	0.17	53					1.93	1.5	0.08	3		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00436-00002	0.31	0.09	0.17	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00424-00012	0.34	0.19	0.23	53					1.93	1.5	0.08	9			
1"	Bronze Low E w/Argon	WEA-N-301-00432-00012	0.32	0.18	0.23	55				Y	1.82	1.5	0.08	10			
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-301-00423-00003	0.42	0.30	0.30	44					2.38	1.5	0.08	5		
	1"	Insul Low-E	WEA-N-301-00424-00003	0.34	0.17	0.26	53					1.93	1.5	0.08	7		
	1"	Insul Low E w/Argon	WEA-N-301-00432-00003	0.32	0.17	0.26	55				Y	1.82	1.5	0.08	10		
	1"	Passive Solar	WEA-N-301-00426-00003	0.34	0.27	0.29	52					1.93	1.5	0.08	13		
	1"	Passive Solar w/Argon	WEA-N-301-00434-00003	0.32	0.27	0.29	55					1.82	1.5	0.08	16		
	1"	Passive Solar Extreme	WEA-N-301-00430-00003	0.30	0.24	0.28	42					1.70	1.5	0.08	16		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00438-00003	0.29	0.24	0.28	45					1.65	1.5	0.08	18		
	1"	Zo-e-shield 5	WEA-N-301-00425-00003	0.34	0.12	0.24	53					1.93	1.5	0.08	5		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00433-00003	0.31	0.11	0.24	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00429-00003	0.30	0.11	0.23	43				Y	Y	1.70	1.5	0.08	9	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00437-00003	0.28	0.11	0.23	46			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e-shield 6	WEA-N-301-00509-00003	0.29	0.11	0.23	40				Y	Y	1.65	1.5	0.08	10	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00516-00003	0.28	0.11	0.23	45			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00508-00003	0.33	0.11	0.23	51					1.87	1.5	0.08	5		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00515-00003	0.31	0.11	0.23	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 7	WEA-N-301-00488-00002	0.29	0.11	0.19	59				Y	Y	1.65	1.5	0.08	10	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00492-00002	0.27	0.11	0.19	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00427-00003	0.34	0.11	0.15	52					1.93	1.5	0.08	4		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00435-00003	0.32	0.11	0.15	55				Y	1.82	1.5	0.08	6		
	1"	Insul Low-E 340	WEA-N-301-00428-00003	0.34	0.08	0.14	53					1.93	1.5	0.08	2		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00436-00003	0.31	0.08	0.14	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00424-00013	0.34	0.16	0.19	53					1.93	1.5	0.08	7			
1"	Bronze Low E w/Argon	WEA-N-301-00432-00013	0.32	0.16	0.19	55				Y	1.82	1.5	0.08	9			

US Qualification Criteria	Climate Zone	U-Value	SHGC		
 <p>Energy Star Version 7.0 Starting October 2023</p>	Northern	<=0.22	>=0.17	Prescriptive	
			=0.23	>=0.35	Equivalent Energy Performance
			=0.24		
			=0.25	>=0.40	
			=0.26		
	North-Central	<=0.25	<=0.40		
	South-Central	<=0.28	<=0.23		
Southern	<=0.32	<=0.23			

Canadian Qualification Criteria	U-Value	or	Energy Rating
 <p>Energy Star Version 5.0 starting January 2020</p>	<=1.22		>=34
	Air Leakage <= 1.5 L/s/m2		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA						
Premium Bi-fold Windows (8622) - U-channel sill											ENERGY STAR						
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 5.0	
								N	NC	SC	S						
No GIA or SDL	1"	Clear Insul	WEA-N-301-00603-00001	0.42	0.41	0.43	46					2.38	1.5	0.08	11		
	1"	Insul Low-E	WEA-N-301-00604-00001	0.34	0.23	0.37	53					1.93	1.5	0.08	11		
	1"	Insul Low E w/Argon	WEA-N-301-00612-00001	0.32	0.22	0.37	55					1.82	1.5	0.08	13		
	1"	Passive Solar	WEA-N-301-00606-00001	0.34	0.37	0.41	52					1.93	1.5	0.08	19		
	1"	Passive Solar w/Argon	WEA-N-301-00614-00001	0.32	0.37	0.41	55					1.82	1.5	0.08	21		
	1"	Passive Solar Extreme	WEA-N-301-00610-00001	0.30	0.33	0.40	42					1.70	1.5	0.08	22		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00618-00001	0.29	0.33	0.40	45					1.65	1.5	0.08	23		
	1"	Zo-e-shield 5	WEA-N-301-00605-00001	0.33	0.15	0.34	53					1.87	1.5	0.08	8		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00613-00001	0.31	0.15	0.34	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00609-00001	0.30	0.15	0.33	43				Y	1.70	1.5	0.08	11		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00617-00001	0.28	0.15	0.33	46			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e-shield 6	WEA-N-301-00689-00001	0.29	0.15	0.32	40				Y	Y	1.65	1.5	0.08	12	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00696-00001	0.28	0.15	0.32	45			Y	Y	1.59	1.5	0.08	14		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00688-00001	0.33	0.15	0.33	51					1.87	1.5	0.08	8		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00695-00001	0.31	0.15	0.33	56				Y	1.76	1.5	0.08	10		
	1"	Zo-e-shield 7	WEA-N-301-00667-00001	0.29	0.14	0.27	59				Y	1.65	1.5	0.08	12		
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00671-00001	0.26	0.14	0.27	62			Y	Y	1.48	1.5	0.08	16		
	1"	Insul Low-E 240	WEA-N-301-00607-00001	0.34	0.14	0.21	52					1.93	1.5	0.08	6		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00615-00001	0.32	0.14	0.21	55				Y	1.82	1.5	0.08	8		
	1"	Insul Low-E 340	WEA-N-301-00608-00001	0.34	0.11	0.20	53					1.93	1.5	0.08	4		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00616-00001	0.31	0.10	0.20	56				Y	1.76	1.5	0.08	7			
1"	Bronze Low E	WEA-N-301-00604-00011	0.34	0.21	0.28	53					1.93	1.5	0.08	10			
1"	Bronze Low E w/Argon	WEA-N-301-00612-00011	0.32	0.21	0.28	55				Y	1.82	1.5	0.08	12			
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-301-00603-00002	0.42	0.35	0.36	46					2.38	1.5	0.08	8		
	1"	Insul Low-E	WEA-N-301-00604-00002	0.34	0.20	0.32	53					1.93	1.5	0.08	9		
	1"	Insul Low E w/Argon	WEA-N-301-00612-00002	0.32	0.19	0.32	55				Y	1.82	1.5	0.08	11		
	1"	Passive Solar	WEA-N-301-00606-00002	0.34	0.31	0.35	52					1.93	1.5	0.08	15		
	1"	Passive Solar w/Argon	WEA-N-301-00614-00002	0.32	0.31	0.35	55					1.82	1.5	0.08	18		
	1"	Passive Solar Extreme	WEA-N-301-00610-00002	0.30	0.29	0.34	42					1.70	1.5	0.08	19		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00618-00002	0.29	0.29	0.34	45					1.65	1.5	0.08	20		
	1"	Zo-e-shield 5	WEA-N-301-00605-00002	0.33	0.13	0.28	53					1.87	1.5	0.08	6		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00613-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00609-00002	0.30	0.13	0.28	43				Y	1.70	1.5	0.08	10		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00617-00002	0.28	0.13	0.28	46			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e-shield 6	WEA-N-301-00689-00002	0.29	0.13	0.27	40				Y	1.65	1.5	0.08	11		
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00696-00002	0.28	0.13	0.27	45			Y	Y	1.59	1.5	0.08	13		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00688-00002	0.33	0.13	0.28	51					1.87	1.5	0.08	6		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00695-00002	0.31	0.13	0.28	56				Y	1.76	1.5	0.08	9		
	1"	Zo-e-shield 7	WEA-N-301-00668-00001	0.29	0.12	0.23	59				Y	1.65	1.5	0.08	11		
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00672-00001	0.27	0.12	0.23	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00607-00002	0.34	0.13	0.18	52					1.93	1.5	0.08	5		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00615-00002	0.32	0.12	0.18	55				Y	1.82	1.5	0.08	7		
	1"	Insul Low-E 340	WEA-N-301-00608-00002	0.34	0.09	0.17	53					1.93	1.5	0.08	3		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00616-00002	0.31	0.09	0.17	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00604-00012	0.34	0.19	0.23	53					1.93	1.5	0.08	9			
1"	Bronze Low E w/Argon	WEA-N-301-00612-00012	0.32	0.18	0.23	55				Y	1.82	1.5	0.08	10			
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-301-00603-00003	0.42	0.30	0.30	46					2.38	1.5	0.08	5		
	1"	Insul Low-E	WEA-N-301-00604-00003	0.34	0.17	0.26	53					1.93	1.5	0.08	7		
	1"	Insul Low E w/Argon	WEA-N-301-00612-00003	0.32	0.17	0.26	55				Y	1.82	1.5	0.08	10		
	1"	Passive Solar	WEA-N-301-00606-00003	0.34	0.27	0.29	52					1.93	1.5	0.08	13		
	1"	Passive Solar w/Argon	WEA-N-301-00614-00003	0.32	0.27	0.29	55					1.82	1.5	0.08	16		
	1"	Passive Solar Extreme	WEA-N-301-00610-00003	0.30	0.24	0.28	42					1.70	1.5	0.08	16		
	1"	Passive Solar Extreme w/Argon	WEA-N-301-00618-00003	0.29	0.24	0.28	45					1.65	1.5	0.08	18		
	1"	Zo-e-shield 5	WEA-N-301-00605-00003	0.33	0.12	0.24	53					1.87	1.5	0.08	6		
	1"	Zo-e-shield 5 w/ Argon	WEA-N-301-00613-00003	0.31	0.11	0.24	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 5 Extreme	WEA-N-301-00609-00003	0.30	0.11	0.23	43				Y	1.70	1.5	0.08	9		
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-301-00617-00003	0.28	0.11	0.23	46			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e-shield 6	WEA-N-301-00689-00003	0.29	0.11	0.23	40				Y	1.65	1.5	0.08	10		
	1"	Zo-e-shield 6 w/ Argon	WEA-N-301-00696-00003	0.28	0.11	0.23	45			Y	Y	1.59	1.5	0.08	11		
	1"	Zo-e SafeGuard Certified	WEA-N-301-00688-00003	0.33	0.11	0.23	51					1.87	1.5	0.08	5		
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-301-00695-00003	0.31	0.11	0.23	56				Y	1.76	1.5	0.08	8		
	1"	Zo-e-shield 7	WEA-N-301-00668-00002	0.29	0.11	0.19	59				Y	1.65	1.5	0.08	10		
	1"	Zo-e-shield 7 w/ Argon	WEA-N-301-00672-00002	0.27	0.11	0.19	62			Y	Y	1.53	1.5	0.08	13		
	1"	Insul Low-E 240	WEA-N-301-00607-00003	0.34	0.11	0.15	52					1.93	1.5	0.08	4		
	1"	Insul Low-E 240 w/Argon	WEA-N-301-00615-00003	0.32	0.11	0.15	55				Y	1.82	1.5	0.08	6		
	1"	Insul Low-E 340	WEA-N-301-00608-00003	0.34	0.08	0.14	53					1.93	1.5	0.08	2		
1"	Insul Low-E 340 w/Argon	WEA-N-301-00616-00003	0.31	0.08	0.14	56				Y	1.76	1.5	0.08	6			
1"	Bronze Low E	WEA-N-301-00604-00013	0.34	0.16	0.19	53					1.93	1.5	0.08	7			
1"	Bronze Low E w/Argon	WEA-N-301-00612-00013	0.32	0.16	0.19	55				Y	1.82	1.5	0.08	9			