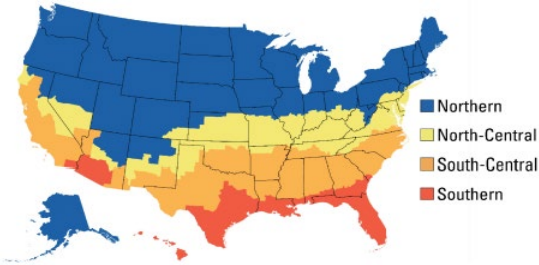



Thermal Performance Data

Premium 2-1/4" Multi-Slide Door (8725) - Standard Sill

WEATHER SHIELD.

WINDOWS & DOORS

US Qualification Criteria	Climate Zone	U-Value	SHGC
 <p>Energy Star Version 7.0 Starting October 2023</p>	Northern	<=0.26	<=0.40
	North-Central		
	South-Central	<=0.28	<=0.23
	Southern		

Canadian Qualification Criteria	U-Value	or	Energy Rating
 <p>Energy Star Version 5.0 starting January 2020</p>	<=1.22		>=34
	Air Leakage <= 1.5 L/s/m2		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.


R-Value


A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA					
Premium 2-1/4" Multi-Slide Door (8725) - Standard Sill											CANADIAN ENERGY PERFORMANCE DATA					
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 5.0
								N	NC	SC	S					
No GIA or SDL	1"	Clear Insul	WEA-N-327-00449-00001	0.45	0.50	0.53	45.00					2.56	1.5	1.20	10	
	1"	Insul Low-E	WEA-N-327-00450-00001	0.34	0.27	0.46	52					1.93	1.5	1.20	11	
	1"	Insul Low E w/Argon	WEA-N-327-00458-00001	0.31	0.27	0.46	55					1.76	1.5	1.20	15	
	1"	Passive Solar	WEA-N-327-00453-00001	0.35	0.44	0.51	52					1.99	1.5	1.20	19	
	1"	Passive Solar w/Argon	WEA-N-327-00461-00001	0.32	0.45	0.51	54					1.82	1.5	1.20	24	
	1"	Passive Solar Extreme	WEA-N-327-00454-00001	0.30	0.41	0.49	42					1.70	1.5	1.20	24	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00462-00001	0.28	0.41	0.49	44					1.59	1.5	1.20	26	
	1"	Zo-e-shield 5	WEA-N-327-00451-00001	0.34	0.18	0.41	52					1.93	1.5	1.20	6	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00459-00001	0.31	0.18	0.41	55					1.76	1.5	1.20	9	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00452-00001	0.29	0.18	0.40	43					1.65	1.5	1.20	12	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00460-00001	0.27	0.18	0.40	45			Y	Y	1.53	1.5	1.20	15	
	1"	Zo-e-shield 6	WEA-N-327-00547-00001	0.33	0.18	0.41	51					1.87	1.5	1.20	7	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00555-00001	0.30	0.18	0.41	54					1.70	1.5	1.20	11	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00552-00001	0.33	0.18	0.40	52					1.87	1.5	1.20	7	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00560-00001	0.30	0.18	0.40	55					1.70	1.5	1.20	11	
	1"	Zo-e-shield 7	WEA-N-327-00465-00001	0.28	0.17	0.33	59			Y	Y	1.59	1.5	1.20	13	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00469-00001	0.25	0.17	0.33	61	Y	Y	Y	Y	1.42	1.5	1.20	16	
	1"	Insul Low-E 240	WEA-N-327-00455-00001	0.34	0.17	0.26	51					1.93	1.5	1.20	5	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00463-00001	0.32	0.17	0.26	54					1.82	1.5	1.20	8	
	1"	Insul Low-E 340	WEA-N-327-00456-00001	0.34	0.12	0.25	52					1.93	1.5	1.20	2	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00464-00001	0.31	0.12	0.25	55					1.76	1.5	1.20	6		
1"	Bronze Low E	WEA-N-327-00450-00011	0.34	0.26	0.34	52					1.93	1.5	1.20	10		
1"	Bronze Low E w/Argon	WEA-N-327-00458-00011	0.31	0.26	0.34	55					1.76	1.5	1.20	14		
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-327-00449-00002	0.45	0.44	0.45	45					2.56	1.5	1.20	7	
	1"	Insul Low-E	WEA-N-327-00450-00002	0.34	0.24	0.40	52					1.93	1.5	1.20	9	
	1"	Insul Low E w/Argon	WEA-N-327-00458-00002	0.31	0.24	0.40	55					1.76	1.5	1.20	13	
	1"	Passive Solar	WEA-N-327-00453-00002	0.35	0.39	0.44	52					1.99	1.5	1.20	17	
	1"	Passive Solar w/Argon	WEA-N-327-00461-00002	0.32	0.39	0.44	54					1.82	1.5	1.20	20	
	1"	Passive Solar Extreme	WEA-N-327-00454-00002	0.30	0.35	0.43	42					1.70	1.5	1.20	21	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00462-00002	0.28	0.35	0.43	44					1.59	1.5	1.20	23	
	1"	Zo-e-shield 5	WEA-N-327-00451-00002	0.34	0.16	0.36	52					1.93	1.5	1.20	5	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00459-00002	0.31	0.16	0.36	55					1.76	1.5	1.20	8	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00452-00002	0.29	0.16	0.35	43					1.65	1.5	1.20	11	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00460-00002	0.27	0.16	0.35	45			Y	Y	1.53	1.5	1.20	13	
	1"	Zo-e-shield 6	WEA-N-327-00547-00002	0.33	0.16	0.35	51					1.87	1.5	1.20	6	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00555-00002	0.30	0.16	0.35	54					1.70	1.5	1.20	10	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00552-00002	0.33	0.16	0.35	52					1.87	1.5	1.20	6	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00560-00002	0.30	0.16	0.35	55					1.70	1.5	1.20	10	
	1"	Zo-e-shield 7	WEA-N-327-00466-00001	0.28	0.15	0.28	59			Y	Y	1.59	1.5	1.20	11	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00470-00001	0.25	0.15	0.28	61	Y	Y	Y	Y	1.42	1.5	1.20	15	
	1"	Insul Low-E 240	WEA-N-327-00455-00002	0.34	0.15	0.22	51					1.93	1.5	1.20	4	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00463-00002	0.32	0.15	0.22	54					1.82	1.5	1.20	6	
	1"	Insul Low-E 340	WEA-N-327-00456-00002	0.34	0.11	0.21	52					1.93	1.5	1.20	2	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00464-00002	0.31	0.11	0.21	55					1.76	1.5	1.20	5		
1"	Bronze Low E	WEA-N-327-00450-00012	0.34	0.23	0.30	52					1.93	1.5	1.20	9		
1"	Bronze Low E w/Argon	WEA-N-327-00458-00012	0.31	0.23	0.30	55					1.76	1.5	1.20	12		
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-327-00449-00003	0.45	0.38	0.39	45					2.56	1.5	1.20	4	
	1"	Insul Low-E	WEA-N-327-00450-00003	0.34	0.21	0.34	52					1.93	1.5	1.20	7	
	1"	Insul Low E w/Argon	WEA-N-327-00458-00003	0.31	0.21	0.34	55					1.76	1.5	1.20	11	
	1"	Passive Solar	WEA-N-327-00453-00003	0.35	0.33	0.37	52					1.99	1.5	1.20	13	
	1"	Passive Solar w/Argon	WEA-N-327-00461-00003	0.32	0.33	0.37	54					1.82	1.5	1.20	17	
	1"	Passive Solar Extreme	WEA-N-327-00454-00003	0.30	0.31	0.36	42					1.70	1.5	1.20	18	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00462-00003	0.28	0.31	0.36	44					1.59	1.5	1.20	21	
	1"	Zo-e-shield 5	WEA-N-327-00451-00003	0.34	0.14	0.30	52					1.93	1.5	1.20	3	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00459-00003	0.31	0.14	0.30	55					1.76	1.5	1.20	7	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00452-00003	0.29	0.14	0.30	43					1.65	1.5	1.20	10	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00460-00003	0.27	0.14	0.30	45			Y	Y	1.53	1.5	1.20	12	
	1"	Zo-e-shield 6	WEA-N-327-00547-00003	0.33	0.14	0.30	51					1.87	1.5	1.20	5	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00555-00003	0.30	0.14	0.30	54					1.70	1.5	1.20	8	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00552-00003	0.33	0.14	0.30	52					1.87	1.5	1.20	5	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00560-00003	0.30	0.14	0.30	55					1.70	1.5	1.20	8	
	1"	Zo-e-shield 7	WEA-N-327-00466-00002	0.28	0.13	0.24	59			Y	Y	1.59	1.5	1.20	10	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00470-00002	0.25	0.13	0.24	61	Y	Y	Y	Y	1.42	1.5	1.20	14	
	1"	Insul Low-E 240	WEA-N-327-00455-00003	0.34	0.13	0.19	51					1.93	1.5	1.20	3	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00463-00003	0.32	0.13	0.19	54					1.82	1.5	1.20	5	
	1"	Insul Low-E 340	WEA-N-327-00456-00003	0.34	0.10	0.18	52					1.93	1.5	1.20	1	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00464-00003	0.31	0.10	0.18	55					1.76	1.5	1.20	5		
1"	Bronze Low E	WEA-N-327-00450-00013	0.34	0.20	0.25	52					1.93	1.5	1.20	7		
1"	Bronze Low E w/Argon	WEA-N-327-00458-00013	0.31	0.20	0.25	55					1.76	1.5	1.20	11		

US Qualification Criteria	Climate Zone	U-Value	SHGC
 <p>Energy Star Version 7.0 Starting October 2023</p>	Northern	<=0.26	<=0.40
	North-Central		
	South-Central	<=0.28	<=0.23
	Southern		

Canadian Qualification Criteria	U-Value	or	Energy Rating
 <p>Energy Star Version 5.0 starting January 2020</p>	<=1.22		>=34
	Air Leakage <= 1.5 L/s/m2		

U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

R-Value

A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

^a Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

^b Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA					
Premium 2-1/4" Multi-Slide Door (8725) - T-track Sill											CANADIAN ENERGY PERFORMANCE DATA					
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v 5.0
								N	NC	SC	S					
No GIA or SDL	1"	Clear Insul	WEA-N-327-00673-00001	0.45	0.51	0.53	45.00					2.56	1.5	1.20	11	
	1"	Insul Low-E	WEA-N-327-00674-00001	0.35	0.28	0.47	52					1.99	1.5	1.20	10	
	1"	Insul Low E w/Argon	WEA-N-327-00682-00001	0.32	0.27	0.47	55					1.82	1.5	1.20	13	
	1"	Passive Solar	WEA-N-327-00677-00001	0.35	0.45	0.51	52					1.99	1.5	1.20	20	
	1"	Passive Solar w/Argon	WEA-N-327-00685-00001	0.32	0.45	0.51	54					1.82	1.5	1.20	24	
	1"	Passive Solar Extreme	WEA-N-327-00678-00001	0.30	0.41	0.50	42					1.70	1.5	1.20	24	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00686-00001	0.28	0.41	0.50	44					1.59	1.5	1.20	26	
	1"	Zo-e-shield 5	WEA-N-327-00675-00001	0.34	0.18	0.42	52					1.93	1.5	1.20	6	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00683-00001	0.31	0.18	0.42	55					1.76	1.5	1.20	9	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00676-00001	0.30	0.18	0.41	43					1.70	1.5	1.20	11	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00684-00001	0.28	0.18	0.41	45			Y	Y	1.59	1.5	1.20	13	
	1"	Zo-e-shield 6	WEA-N-327-00771-00001	0.34	0.18	0.41	51					1.93	1.5	1.20	6	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00779-00001	0.31	0.18	0.41	54					1.76	1.5	1.20	9	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00776-00001	0.33	0.18	0.41	52					1.87	1.5	1.20	7	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00784-00001	0.31	0.18	0.41	55					1.76	1.5	1.20	9	
	1"	Zo-e-shield 7	WEA-N-327-00689-00001	0.28	0.17	0.33	59			Y	Y	1.59	1.5	1.20	13	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00693-00001	0.25	0.17	0.33	61	Y	Y	Y	Y	1.42	1.5	1.20	16	
	1"	Insul Low-E 240	WEA-N-327-00679-00001	0.35	0.17	0.26	51					1.99	1.5	1.20	4	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00687-00001	0.32	0.17	0.26	54					1.82	1.5	1.20	8	
	1"	Insul Low-E 340	WEA-N-327-00680-00001	0.34	0.13	0.25	52					1.93	1.5	1.20	3	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00688-00001	0.31	0.12	0.25	55					1.76	1.5	1.20	6		
1"	Bronze Low E	WEA-N-327-00674-00011	0.35	0.26	0.35	52					1.99	1.5	1.20	9		
1"	Bronze Low E w/Argon	WEA-N-327-00682-00011	0.32	0.26	0.35	55					1.82	1.5	1.20	13		
Less Than 1" GIA or SDL	1"	Clear Insul	WEA-N-327-00673-00002	0.45	0.44	0.46	45					2.56	1.5	1.20	7	
	1"	Insul Low-E	WEA-N-327-00674-00002	0.35	0.24	0.40	52					1.99	1.5	1.20	8	
	1"	Insul Low E w/Argon	WEA-N-327-00682-00002	0.32	0.24	0.40	55					1.82	1.5	1.20	12	
	1"	Passive Solar	WEA-N-327-00677-00002	0.35	0.39	0.44	52					1.99	1.5	1.20	17	
	1"	Passive Solar w/Argon	WEA-N-327-00685-00002	0.32	0.39	0.44	54					1.82	1.5	1.20	20	
	1"	Passive Solar Extreme	WEA-N-327-00678-00002	0.30	0.36	0.43	42					1.70	1.5	1.20	21	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00686-00002	0.28	0.36	0.43	44					1.59	1.5	1.20	24	
	1"	Zo-e-shield 5	WEA-N-327-00675-00002	0.34	0.16	0.36	52					1.93	1.5	1.20	5	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00683-00002	0.31	0.16	0.36	55					1.76	1.5	1.20	8	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00676-00002	0.30	0.16	0.35	43					1.70	1.5	1.20	10	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00684-00002	0.28	0.16	0.35	45			Y	Y	1.59	1.5	1.20	12	
	1"	Zo-e-shield 6	WEA-N-327-00771-00002	0.34	0.16	0.36	51					1.93	1.5	1.20	5	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00779-00002	0.31	0.16	0.36	54					1.76	1.5	1.20	8	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00776-00002	0.33	0.16	0.35	52					1.87	1.5	1.20	6	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00784-00002	0.31	0.16	0.35	55					1.76	1.5	1.20	8	
	1"	Zo-e-shield 7	WEA-N-327-00690-00001	0.29	0.15	0.29	58					1.65	1.5	1.20	10	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00694-00001	0.26	0.15	0.29	61	Y	Y	Y	Y	1.48	1.5	1.20	14	
	1"	Insul Low-E 240	WEA-N-327-00679-00002	0.35	0.15	0.22	51					1.99	1.5	1.20	3	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00687-00002	0.32	0.15	0.22	54					1.82	1.5	1.20	6	
	1"	Insul Low-E 340	WEA-N-327-00680-00002	0.34	0.11	0.22	52					1.93	1.5	1.20	2	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00688-00002	0.31	0.11	0.22	55					1.76	1.5	1.20	5		
1"	Bronze Low E	WEA-N-327-00674-00012	0.35	0.23	0.30	52					1.99	1.5	1.20	7		
1"	Bronze Low E w/Argon	WEA-N-327-00682-00012	0.32	0.23	0.30	55					1.82	1.5	1.20	11		
1" Or Over GIA or SDL	1"	Clear Insul	WEA-N-327-00673-00003	0.45	0.38	0.39	45					2.56	1.5	1.20	4	
	1"	Insul Low-E	WEA-N-327-00674-00003	0.35	0.21	0.34	52					1.99	1.5	1.20	6	
	1"	Insul Low E w/Argon	WEA-N-327-00682-00003	0.32	0.21	0.34	55					1.82	1.5	1.20	10	
	1"	Passive Solar	WEA-N-327-00677-00003	0.35	0.34	0.38	52					1.99	1.5	1.20	14	
	1"	Passive Solar w/Argon	WEA-N-327-00685-00003	0.32	0.34	0.38	54					1.82	1.5	1.20	17	
	1"	Passive Solar Extreme	WEA-N-327-00678-00003	0.30	0.31	0.37	42					1.70	1.5	1.20	18	
	1"	Passive Solar Extreme w/Argon	WEA-N-327-00686-00003	0.28	0.31	0.37	44					1.59	1.5	1.20	21	
	1"	Zo-e-shield 5	WEA-N-327-00675-00003	0.34	0.14	0.31	52					1.93	1.5	1.20	3	
	1"	Zo-e-shield 5 w/ Argon	WEA-N-327-00683-00003	0.31	0.14	0.31	55					1.76	1.5	1.20	7	
	1"	Zo-e-shield 5 Extreme	WEA-N-327-00676-00003	0.30	0.14	0.30	43					1.70	1.5	1.20	8	
	1"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-327-00684-00003	0.28	0.14	0.30	45			Y	Y	1.59	1.5	1.20	11	
	1"	Zo-e-shield 6	WEA-N-327-00771-00003	0.34	0.14	0.30	51					1.93	1.5	1.20	3	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-327-00779-00003	0.31	0.14	0.30	54					1.76	1.5	1.20	7	
	1"	Zo-e SafeGuard Certified	WEA-N-327-00776-00003	0.33	0.14	0.30	52					1.87	1.5	1.20	5	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-327-00784-00003	0.31	0.14	0.30	55					1.76	1.5	1.20	7	
	1"	Zo-e-shield 7	WEA-N-327-00690-00002	0.29	0.13	0.25	58					1.65	1.5	1.20	9	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-327-00694-00002	0.26	0.13	0.25	61	Y	Y	Y	Y	1.48	1.5	1.20	13	
	1"	Insul Low-E 240	WEA-N-327-00679-00003	0.35	0.14	0.19	51					1.99	1.5	1.20	2	
	1"	Insul Low-E 240 w/Argon	WEA-N-327-00687-00003	0.32	0.13	0.19	54					1.82	1.5	1.20	5	
	1"	Insul Low-E 340	WEA-N-327-00680-00003	0.34	0.10	0.18	52					1.93	1.5	1.20	1	
1"	Insul Low-E 340 w/Argon	WEA-N-327-00688-00003	0.31	0.10	0.18	55					1.76	1.5	1.20	5		
1"	Bronze Low E	WEA-N-327-00674-00013	0.35	0.20	0.26	52					1.99	1.5	1.20	6		
1"	Bronze Low E w/Argon	WEA-N-327-00682-00013	0.32	0.20	0.26	55					1.82	1.5	1.20	9		