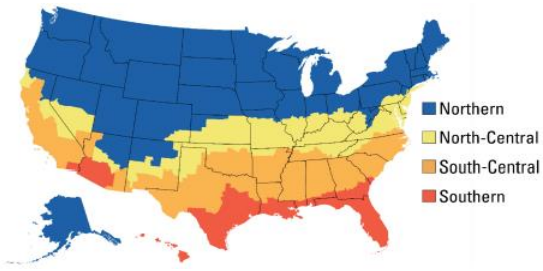


# Thermal Performance Data


Signature 1-3/4" Outswing Side Hinge French Door (8610)

**WEATHER SHIELD.**

**WINDOWS & DOORS**

US Qualification Criteria	Climate Zone	U-Value	SHGC
 <p> <span style="color: blue;">■</span> Northern  <span style="color: yellow;">■</span> North-Central  <span style="color: orange;">■</span> South-Central  <span style="color: red;">■</span> Southern                 </p>	Northern	<=0.26	<=0.40
	North-Central		
	South-Central	<=0.28	<=0.23
	Southern		

Energy Star Version 7.0 Starting October 2023

Canadian Qualification Criteria	U-Value	or	Energy Rating
	<=1.22		>=34
	Air Leakage <= 1.5 L/s/m2		

Energy Star Version 5.0 starting January 2020

### U-Value

A measurement of how much energy a material conducts. The lower the U-Value, the greater the insulating effect.

### Solar Heat Gain Coefficient (SHGC)

Measures how well a window or door prevents heat from passing through it. The lower a window or door's SHGC, the less heat it allows to pass through it.

### Visible Light Transmittance

The amount of light in the visible portion of the spectrum that passes through a glazing material.

### Condensation Resistance Rating

Measures how well a window resists the formation of condensation on the inside surface. The higher the number the better resistance to condensation.

### Energy Rating

A value demonstrating the balance between U-Value, SHGC and air leakage. The higher the number, the more efficient the product.

### R-Value

A measurement of how much a material resists heat transfer. A higher R-Value means a greater insulating effect and a lower rate of heat flow out of the home. While **R-value** measures resistance to heat transfer, **U-value** measures the rate of heat transfer. In simple terms, **U-value** is the mathematical reciprocal of **R-value**; that is, **U = 1/R and R = 1/U**.

<sup>a</sup> Total Unit calculations are derived from computer simulations that are then verified by 3rd party testing in accordance with NFRC 100, NFRC 200, and NFRC 500.

<sup>b</sup> Published values reflect 3mm glass lite thicknesses.

ENERGY PERFORMANCE DATA											CANADIAN ENERGY PERFORMANCE DATA					
Signature 1-3/4" Outswing Side Hinge French Door (8610)											CANADIAN ENERGY PERFORMANCE DATA					
Grille Option	Glazing thickness	NFRC Total Unit Calculations Glazing Option	CPD #	U-Value	Solar Heat Gain Coefficient	Visible Light Transmittance	Condensation Resistance Rating	US ENERGY STAR V 7.0				U-Value (metric)	Maximum Air Leakage L/s/m2	Air Infiltration/Exfiltration Average	Energy Rating	CANADA ENERGY STAR v5.0
								N	NC	SC	S					
No GIA or SDL	3/4"	Clear Insul	WEA-N-297-01962-00001	0.46	0.44	0.45	44					2.61	1.5	0.05	8	
	3/4"	Insul Low-E	WEA-N-297-01963-00001	0.36	0.24	0.40	56					2.04	1.5	0.05	9	
	3/4"	Insul Low E w/Argon	WEA-N-297-01971-00001	0.34	0.24	0.40	57					1.93	1.5	0.05	11	
	3/4"	Passive Solar	WEA-N-297-01965-00001	0.37	0.39	0.44	55					2.10	1.5	0.05	16	
	3/4"	Passive Solar w/Argon	WEA-N-297-01973-00001	0.34	0.39	0.44	57					1.93	1.5	0.05	20	
	3/4"	Passive Solar Extreme	WEA-N-297-01969-00001	0.33	0.35	0.43	42					1.87	1.5	0.05	19	
	3/4"	Passive Solar Extreme w/Argon	WEA-N-297-01977-00001	0.31	0.35	0.43	45					1.76	1.5	0.05	22	
	3/4"	Zo-e-shield 5	WEA-N-297-01964-00001	0.36	0.16	0.36	56					2.04	1.5	0.05	4	
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-297-01972-00001	0.33	0.16	0.36	57					1.87	1.5	0.05	8	
	3/4"	Zo-e-shield 5 Extreme	WEA-N-297-01968-00001	0.32	0.16	0.35	43					1.82	1.5	0.05	9	
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-297-01976-00001	0.30	0.16	0.35	47					1.70	1.5	0.05	12	
	1"	Zo-e-shield 6	WEA-N-297-02104-00001	0.36	0.16	0.35	56					2.04	1.5	0.05	4	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-297-02111-00001	0.33	0.16	0.35	58					1.87	1.5	0.05	8	
	1"	Zo-e SafeGuard Certified	WEA-N-297-02107-00001	0.36	0.16	0.35	57					2.04	1.5	0.05	4	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-297-02114-00001	0.33	0.16	0.35	58					1.87	1.5	0.05	8	
	1"	Zo-e-shield 7	WEA-N-297-02166-00001	0.31	0.15	0.29	59					1.76	1.5	0.05	10	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-297-02168-00001	0.28	0.15	0.29	59			Y	Y	1.59	1.5	0.05	14	
	3/4"	Insul Low-E 240	WEA-N-297-01966-00001	0.36	0.15	0.22	55					2.04	1.5	0.05	4	
	3/4"	Insul Low-E 240 w/Argon	WEA-N-297-01974-00001	0.34	0.15	0.22	57					1.93	1.5	0.05	6	
	3/4"	Insul Low-E 340	WEA-N-297-01967-00001	0.36	0.11	0.21	56					2.04	1.5	0.05	2	
3/4"	Insul Low-E 340 w/Argon	WEA-N-297-01975-00001	0.34	0.11	0.21	57					1.93	1.5	0.05	4		
3/4"	Bronze Low E	WEA-N-297-01963-00011	0.36	0.23	0.30	56					2.04	1.5	0.05	9		
3/4"	Bronze Low E w/Argon	WEA-N-297-01971-00011	0.34	0.23	0.30	57					1.93	1.5	0.05	11		
Less Than 1" GIA or SDL	3/4"	Clear Insul	WEA-N-297-01962-00002	0.46	0.38	0.39	44					2.61	1.5	0.05	5	
	3/4"	Insul Low-E	WEA-N-297-01963-00002	0.36	0.21	0.34	56					2.04	1.5	0.05	7	
	3/4"	Insul Low E w/Argon	WEA-N-297-01971-00002	0.34	0.21	0.34	57					1.93	1.5	0.05	10	
	3/4"	Passive Solar	WEA-N-297-01965-00002	0.37	0.34	0.37	55					2.10	1.5	0.05	14	
	3/4"	Passive Solar w/Argon	WEA-N-297-01973-00002	0.34	0.34	0.37	57					1.93	1.5	0.05	17	
	3/4"	Passive Solar Extreme	WEA-N-297-01969-00002	0.33	0.31	0.36	42					1.87	1.5	0.05	17	
	3/4"	Passive Solar Extreme w/Argon	WEA-N-297-01977-00002	0.31	0.31	0.36	45					1.76	1.5	0.05	19	
	3/4"	Zo-e-shield 5	WEA-N-297-01964-00002	0.36	0.14	0.30	56					2.04	1.5	0.05	3	
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-297-01972-00002	0.33	0.14	0.30	57					1.87	1.5	0.05	7	
	3/4"	Zo-e-shield 5 Extreme	WEA-N-297-01968-00002	0.32	0.14	0.30	43					1.82	1.5	0.05	8	
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-297-01976-00002	0.30	0.14	0.30	47					1.70	1.5	0.05	11	
	1"	Zo-e-shield 6	WEA-N-297-02104-00002	0.36	0.14	0.30	56					2.04	1.5	0.05	3	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-297-02111-00002	0.33	0.14	0.30	58					1.87	1.5	0.05	7	
	1"	Zo-e SafeGuard Certified	WEA-N-297-02107-00002	0.36	0.14	0.30	57					2.04	1.5	0.05	3	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-297-02114-00002	0.33	0.14	0.30	58					1.87	1.5	0.05	7	
	1"	Zo-e-shield 7	WEA-N-297-02178-00001	0.31	0.13	0.24	59					1.76	1.5	0.05	9	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-297-02180-00001	0.29	0.13	0.24	59					1.65	1.5	0.05	11	
	3/4"	Insul Low-E 240	WEA-N-297-01966-00002	0.36	0.14	0.19	55					2.04	1.5	0.05	3	
	3/4"	Insul Low-E 240 w/Argon	WEA-N-297-01974-00002	0.34	0.13	0.19	57					1.93	1.5	0.05	5	
	3/4"	Insul Low-E 340	WEA-N-297-01967-00002	0.36	0.10	0.18	56					2.04	1.5	0.05	1	
3/4"	Insul Low-E 340 w/Argon	WEA-N-297-01975-00002	0.34	0.10	0.18	57					1.93	1.5	0.05	3		
3/4"	Bronze Low E	WEA-N-297-01963-00012	0.36	0.20	0.25	56					2.04	1.5	0.05	7		
3/4"	Bronze Low E w/Argon	WEA-N-297-01971-00012	0.34	0.20	0.25	57					1.93	1.5	0.05	9		
1" Or Over GIA or SDL	3/4"	Clear Insul	WEA-N-297-01962-00003	0.46	0.32	0.32	44					2.61	1.5	0.05	1	
	3/4"	Insul Low-E	WEA-N-297-01963-00003	0.36	0.18	0.28	56					2.04	1.5	0.05	6	
	3/4"	Insul Low E w/Argon	WEA-N-297-01971-00003	0.34	0.18	0.28	57					1.93	1.5	0.05	8	
	3/4"	Passive Solar	WEA-N-297-01965-00003	0.37	0.29	0.31	55					2.10	1.5	0.05	11	
	3/4"	Passive Solar w/Argon	WEA-N-297-01973-00003	0.34	0.29	0.31	57					1.93	1.5	0.05	14	
	3/4"	Passive Solar Extreme	WEA-N-297-01969-00003	0.33	0.26	0.31	42					1.87	1.5	0.05	14	
	3/4"	Passive Solar Extreme w/Argon	WEA-N-297-01977-00003	0.31	0.26	0.31	45					1.76	1.5	0.05	16	
	3/4"	Zo-e-shield 5	WEA-N-297-01964-00003	0.36	0.13	0.26	56					2.04	1.5	0.05	3	
	3/4"	Zo-e-shield 5 w/ Argon	WEA-N-297-01972-00003	0.33	0.12	0.26	57					1.87	1.5	0.05	6	
	3/4"	Zo-e-shield 5 Extreme	WEA-N-297-01968-00003	0.32	0.12	0.25	43					1.82	1.5	0.05	7	
	3/4"	Zo-e-shield 5 Extreme w/ Argon	WEA-N-297-01976-00003	0.30	0.12	0.25	47					1.70	1.5	0.05	10	
	1"	Zo-e-shield 6	WEA-N-297-02104-00003	0.36	0.12	0.25	56					2.04	1.5	0.05	2	
	1"	Zo-e-shield 6 w/ Argon	WEA-N-297-02111-00003	0.33	0.12	0.25	58					1.87	1.5	0.05	6	
	1"	Zo-e SafeGuard Certified	WEA-N-297-02107-00003	0.36	0.12	0.25	57					2.04	1.5	0.05	2	
	1"	Zo-e SafeGuard Certified w/ Argon	WEA-N-297-02114-00003	0.33	0.12	0.25	58					1.87	1.5	0.05	6	
	1"	Zo-e-shield 7	WEA-N-297-02178-00002	0.31	0.12	0.20	59					1.76	1.5	0.05	8	
	1"	Zo-e-shield 7 w/ Argon	WEA-N-297-02180-00002	0.29	0.11	0.20	59					1.65	1.5	0.05	10	
	3/4"	Insul Low-E 240	WEA-N-297-01966-00003	0.36	0.12	0.16	55					2.04	1.5	0.05	2	
	3/4"	Insul Low-E 240 w/Argon	WEA-N-297-01974-00003	0.34	0.12	0.16	57					1.93	1.5	0.05	5	
	3/4"	Insul Low-E 340	WEA-N-297-01967-00003	0.36	0.09	0.15	56					2.04	1.5	0.05	0	
3/4"	Insul Low-E 340 w/Argon	WEA-N-297-01975-00003	0.34	0.09	0.15	57					1.93	1.5	0.05	3		
3/4"	Bronze Low E	WEA-N-297-01963-00013	0.36	0.17	0.21	56					2.04	1.5	0.05	5		
3/4"	Bronze Low E w/Argon	WEA-N-297-01971-00013	0.34	0.17	0.21	57					1.93	1.5	0.05	7		